

DS-UPS3000-x UPS



- LCD display
- Wide input voltage range
- Built-in AVR
- Super fast charging
- Overload and short circuit protection
- USB port for remote control
- Compact design


▪ Specification


| Model | | DS-UPS3000-x |
|-------------------|-----------------------|---|
| Power | UPS Capacity | 3000 VA / 1800 W |
| Input | Input Voltage Range | 85 VAC to 150 VAC |
| | Input Frequency | 50/60 Hz |
| Output | Output Voltage Range | 110 VAC to 125 VAC |
| | Output Frequency | 60 Hz ± 0.5 Hz |
| | Transfer Time | ≤ 10 ms |
| | Waveform | PWM |
| Battery | Battery Type | 12 V/9 Ah *4 pcs |
| | Recharge Time | 6-8 hours recover to 90% capacity |
| Indicator | Display | LCD Screen Input Voltage, Output Voltage, Battery capacity, load level |
| | Alarm | Charging Mode (DC mode): Sounding every 8 seconds Low Battery: Sounding every second Overloading Mode: Sounding every 0.5 seconds Fault: Continuously sounding |
| Interface | Communicate Ports | USB |
| Protection | Full Protection | Surge protection, Overload protection, Short circuit protection |
| General | Operating Temperature | 0 °C to 40 °C (32 °F to 104 °F) |
| | Operating Humidity | 30% to 90% (non-condensing) |
| | Dimension | 412 mm × 145 mm × 210 mm (16.22" × 5.71" × 8.27") |
| | Weight | Approx. 18.5 kg (40.8 lb) |

▪ Available Model

DS-UPS3000-x

▪ Dimension

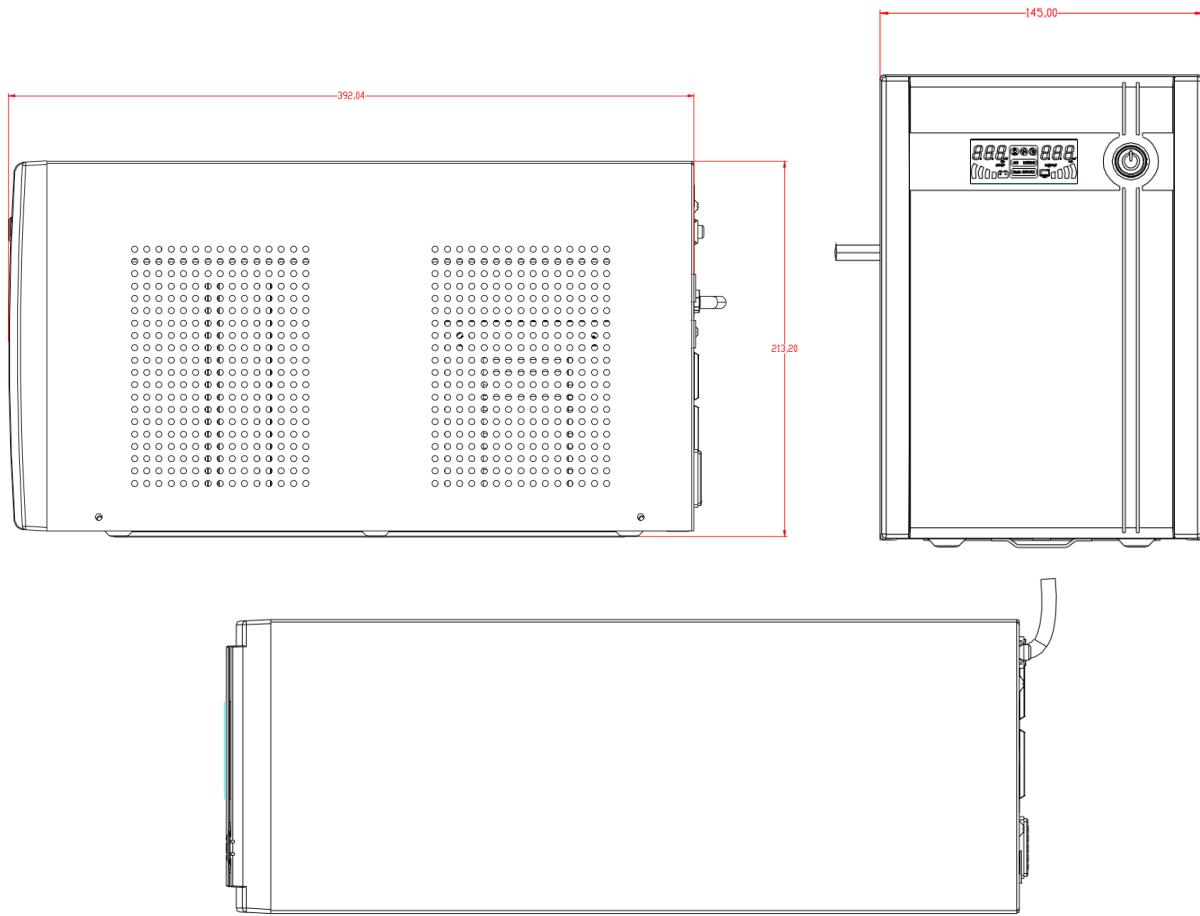

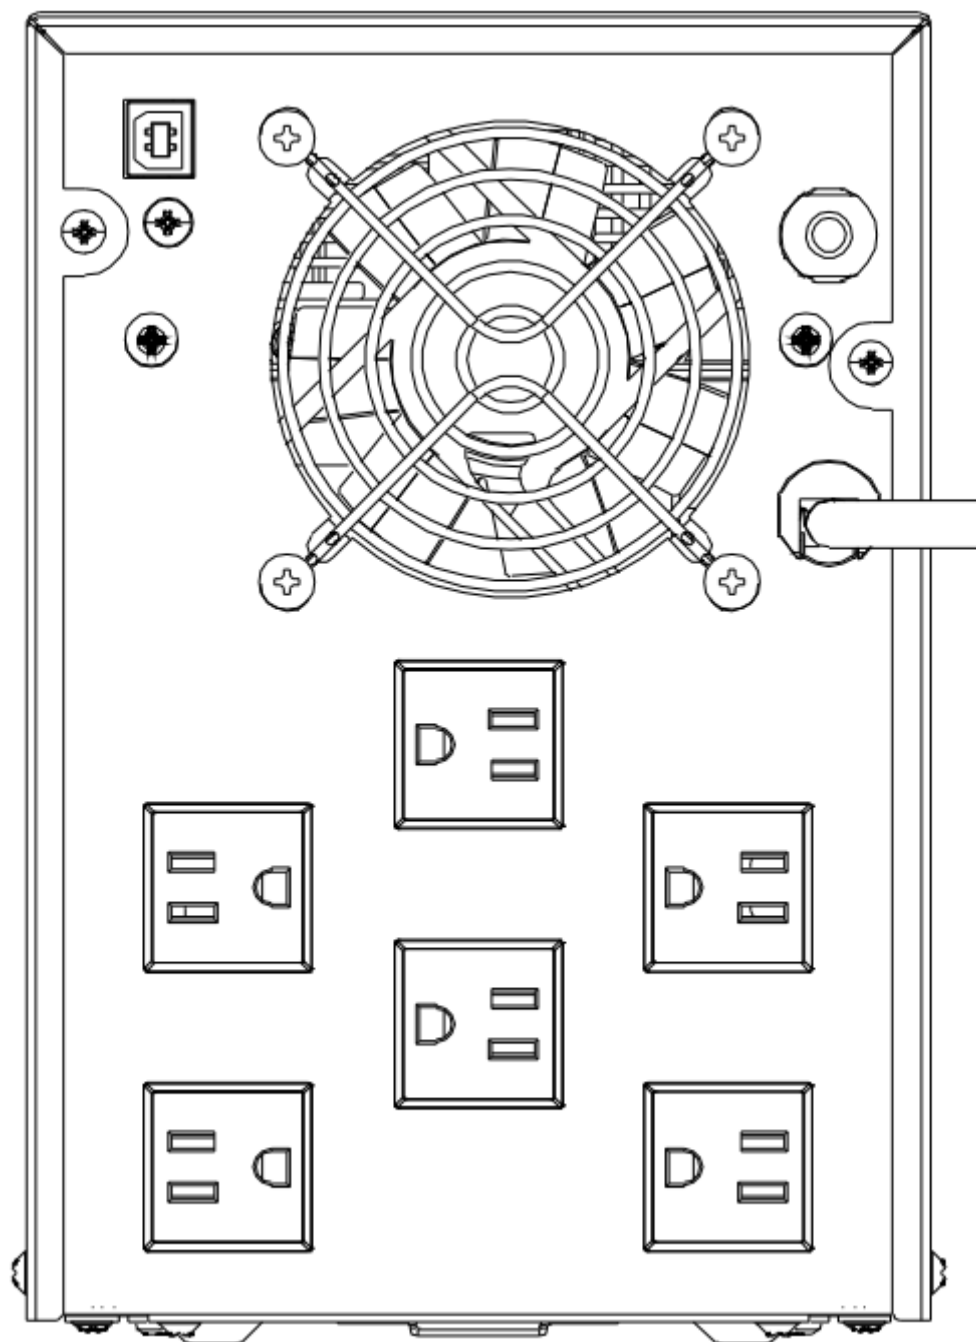

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq