



- Supports connecting to multiple cameras, including normal cameras, smart monitoring cameras, traffic cameras for checkpoint and intersection violation system, network speed domes, etc. It can be used as an outdoor NVR.
- Supports connecting to multiple container No. capture cameras. Provides functions of picture composition, data storage, search and export, etc.
- Solid, compact, fan-free, and small size. It is applicable to roadside cabinet and pole mounted cabinet. All the interfaces are designed on the single panel, which makes it easy for construction and operation.
- Up to 2 TB HDD storage. Supports to set the quota of pictures and videos.
- Supports web operations and SDK.
- The device is mainly applied in the dock gate toll station. Supports data structuralization and uploading of the connected container No. capture cameras and checkpoint traffic cameras.





	C	. · c ·		
•	Spe	cifica	ιτιοη	

General				
Working Temperature	-30 °C to +70 °C (-30 °F to +158 °F)			
Working Humidity	5% to 95%			
Power Supply	12 VDC ± 10%			
Dimension($L \times W \times H$)	245 mm × 170 mm × 55 mm (9.65" × 6.69" × 2.17")			
Interface				
Network Interface	$2 \times 10/100/1000$ M Ethernet interface, 8×100 M self-adaptive Ethernet interface			
Audio Output	1			
Alarm Input	1			
Alarm Output	1			
RS-232 Interface	2			
RS-485 Interface	1			
USB	1			
Function				
Network Settings	Two-segment IP address available			
System				
Operation System	Embedded Linux operating system			
Operating GUI	WEB			
HDD Storage	1 × SATA			
RESET	1 × RESET button			
Indicator	4 × indicator (1 × power indicator, 1 × alarm indicator, 1 × HDD indicator, 1 × ready indicator)			

Available Model


DS-TSG200-H/08/2T



Body

size

Dimension

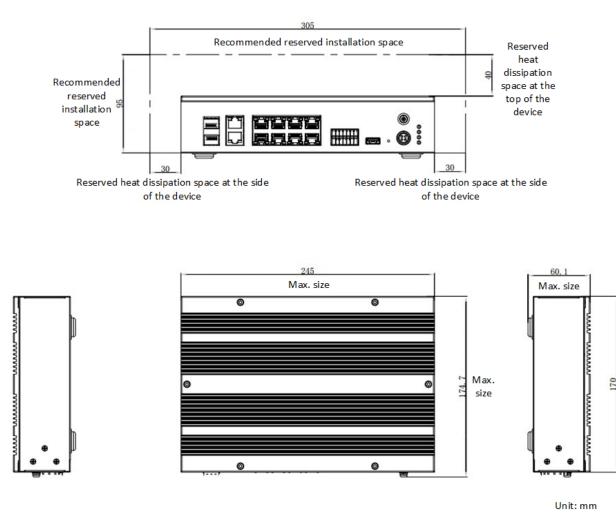

-

HIKVISION°

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T +61-2-8599-4233 salesau@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision Canada T +1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T +601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com

© Hikvision Digital Technology Co., Ltd. 2022 | Data subject to change without notice |