

#### **DS-PDBG8-EG2-WB**

DS-PDBG8-EG2-WB is an Omni-directional wireless glass break detector embeded with high quality microphone sensor which provides reliable detection performance at all times.

- High quality Omni-directional microphone sensor
- Fully remote configurable through App
- Multiple enrollment method and easy installation design
- Easy replaceable battery with PCB protected
- Frequency hopping against jamming for reliable transmission





## Specification

| - Specification                      |   |
|--------------------------------------|---|
| <b>Detection Performance</b>         |   |
| Detection Method                     | Acoustic Sensor   |
| Detection Range                      | 8 m   |
| Detection Angle                      | 120°  |
| Sensitivity                          | 2 m, 4 m, 6 m, 8 m  |
| Glass Type                           | Float, Plate, Tampered, Wired, Laminated Leaded, Double Glazing |
| Glass Thickness                      | 2.4 mm to 6.4 mm  |
| Glass Size                           | 0.3 m x 0.3 m to 3 m x 3 m                                      |
| Feature                              |   |
| Digital Processing                   | Support   |
| Tamper Protection                    | Front, Rear   |
| Environment Temperature<br>Indicator | Support   |
| Signal Strength Indicator            | Support   |
| Interface                            |   |
| Alarm Input                          | Normally Closed, Normally Open, Impulse Count                   |
| Power Switch                         | Power Up Enrolling  |
| LED Indicator                        | Blue(Alarm)   |
| Transmission                         |   |
| Transmission Technology              | Tri-X Wireless  |
| Transmission Method                  | Two-Way RF Wireless   |
| Transmission Frequency               | 433 MHz   |
| Transmission Security                | AES-128 Encryption  |
| Transmission Range(Free Space)       | 1 Km  |
| Frequency Hopping                    | Support   |
| Enrolling Method                     | Power up, Remote ID, QR Code                                    |
| <b>Electrical Characteristics</b>    |   |
| Power Supply                         | Battery Powered   |
| Battery Type                         | CR123A × 2  |
| Typical Voltage                      | 3 V   |
| Standard Battery Life                | 5 years in work status (being triggered 20 times per day)       |
| General                              |   |
| Operation Temperature                | -10 °C to 55 °C (14 °F to 131 °F)                               |
| Storage Temperature                  | -20 °C to 60 °C (-4 °F to 140 °F)                               |
| Operation Humidity                   | 10% to 90%  |
| Dimension(W × H × D)                 | 38.8 mm × 107.0 mm × 24.5 mm                                    |
| Weight                               | 83 g  |
| Mounting Method                      | Wall, Ceiling   |
| Application Scenario                 | Indoor  |
|                                      |   |


## Available Model

DS-PDBG8-EG2-WB




#### Installation

### Choose the right location

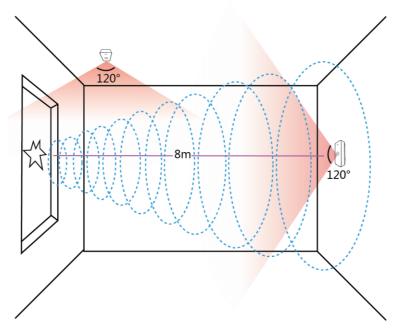

#### Properly test the detector after installation

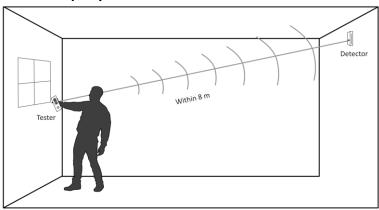

#### Note:

You should use the matching tester.

#### Warning:

- 1. Avoid mounting the detector on the same wall as the protected glass.
- 2. Avoid mounting the detector in rooms with noisy equipment (air compressors, power tools, bells, etc.)
- 3. Avoid mounting the detector in humid rooms (bathroom, etc.)
- 4. Avoid mounting the detector on the wall with strong vibration.



Distributed by

# *HIKVISION*°

#### Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T+662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

**Hikvision Turkey** T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com **Hikvision Russia** T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-{0}31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T+62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com