

DS-K3G501BLX Pro Tripod Turnstile



- Barrier open/closed, free accessing, forbidden mode are selectable.
- LED indicates the entrance/exit and passing status.
- Fire alarm passing: when the fire alarm is triggered, the barrier will be dropped automatically for emergency evacuation.
- Easy integration of any 3rd access control system via relay output.



Specification


Specification	
System	
Motor	/
MCBF	≥ 3 million times
Network	
Wired network	/
Interface	
Exit button	x 2
Fire alarm input	1
Hardware	
Access controller	Not supplied
Function	
Audio prompt	Not support
Keypad configuration	Support
General	
Throughput	30 to 60 persons per minute
	The actual throughput is affected by the person passing rate and passing method.
Lane width	550 mm (21.65")
Barrier material	1.2 mm stainless pipe
Pedestal material	SUS304 stainless steel 1.5 mm
Power consumption	Standby: 15 W
	Working: 30 W
	Peak: 40 W
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	0% to 95% (No condensing)
Protective level	IPX4
Dimensions	Without package: 232 mm × 960 mm × 1208 mm (9.1" × 37.8" × 47.6")
	With package: 410 mm × 1180 mm × 1350 mm (16.1" × 46.5" × 53.1")
Weight	Without package: 41.78 kg (92.11 lb)With package: 51.45 kg(113.43lb)
Approval	CE/CB/RoHS/REACH/WEEE
Power supply method	Power supply: 100 to 120 VAC~ / 200 to 240 VAC~, 50/60 Hz,
Language	Arabic, Indonesian, Japanese, Kazakh, Portuguese (Brazil), Spanish (Mexico), Spanish
	(Spain), Thai, Russian, English
Configuration	
Module selection	NO
Application environment	Outdoor (waterproof)

Available Model

DS-K3G501BLX

Dimension



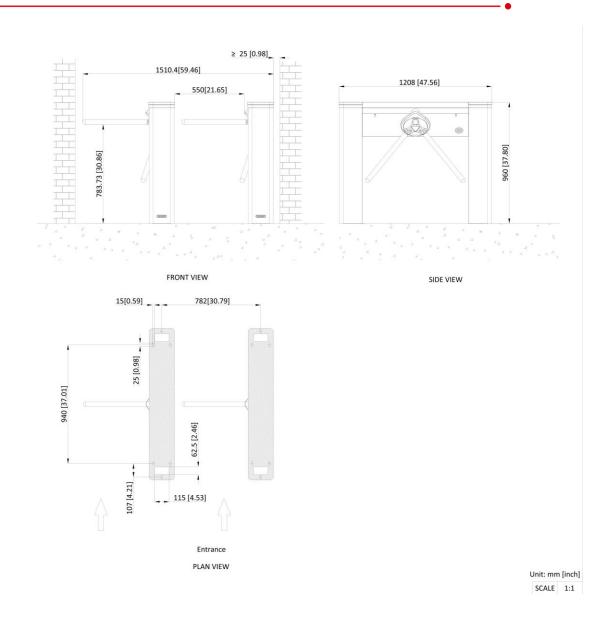

Accessory

Optional





Headquarters No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 www.hikvision.com

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ



Hikvision Corporate Channel



6 hikvisionhq