

DS-2CE16H0T-ITFS 5 MP Audio Fixed Mini Bullet Camera



- 5 MP, 2560 × 1944 resolution
- Digital WDR
- 2.8 mm, 3.6 mm, 6 mm fixed focal lens
- Smart IR, up to 30 m IR distance
- Audio over coaxial cable, built-in mic
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67

▪ Specification

Camera	
Image Sensor	5 MP CMOS
Max. Resolution	2560 (H) × 1944 (V)
Min. Illumination	0.01 Lux@(F2.0, AGC ON), 0 Lux with IR
Shutter Time	PAL: 1/25 s to 1/50,000 s NTSC: 1/30 s to 1/50,000 s
Day & Night	ICR
Angle Adjustment	Pan: 0 to 360°, Tilt: 0 to 90°, Rotation 0 to 360°
Signal System	PAL/NTSC
Lens	
Lens Type	2.8 mm, 3.6 mm, 6 mm fixed lens
Focal Length & FOV	2.8 mm, horizontal FOV: 85.5°, vertical FOV: 63.7°, diagonal FOV: 110.7° 3.6 mm, horizontal FOV: 80.1°, vertical FOV: 63.7°, diagonal FOV: 105.9° 6 mm, horizontal FOV: 57.1°, vertical FOV: 43.1°, diagonal FOV: 72.5°
Lens Mount	M12
Image	
Image Settings	Brightness, Sharpness, Mirror, Smart IR
Frame Rate	TVI: 5MP@20fps, 4MP@30fps, 4MP@25fps, 1080P@30fps, 1080P@25fps CVI: 4MP@30fps, 4MP@25fps AHD: 5MP@20fps, 4MP@30fps, 4MP@25fps CVBS: PAL/NTSC
Day/Night Mode	Auto/Color/BW (Black and White)
Image Enhancement	BLC
White Balance	ATW/MANUAL
AGC	Support
Interface	
Video Output	Switchable TVI/AHD/CVI/CVBS
General	
Material	Metal
Dimension	58 mm × 61 mm × 158.6 mm (2.28" × 2.40" × 6.42")
Weight	Approx. 292 g (0.64 lb.)
Operating Condition	-40° C to 60° C (-40° F to 140° F), Humidity 90% or less (no condensation)
Communication	HIKVISION-C
Language	English
Power Supply	12 VDC ± 25% *You are recommended to use one power adapter to supply the power for one camera.
Consumption	Max. 3.7 W
IR Range	Up to 30 m
Approval	
Protection	IP67

▪ Available Model

DS-2CE16H0T-ITFS(2.8mm)

DS-2CE16H0T-ITFS(3.6mm)

DS-2CE16H0T-ITFS(6mm)

DS-T500A(2.8mm)(〇〇〇 "Х и к в и ж н")


DS-T500A(3.6mm)(〇〇〇 "Х и к в и ж н")

DS-T500A(6mm)(〇〇〇 "Х и к в и ж н")

DS-2CE16H0T-ITFS(3.6mm)(India-L)

DS-2CE16H0T-ITFS(2.8mm)(Syscom)

▪ Dimension

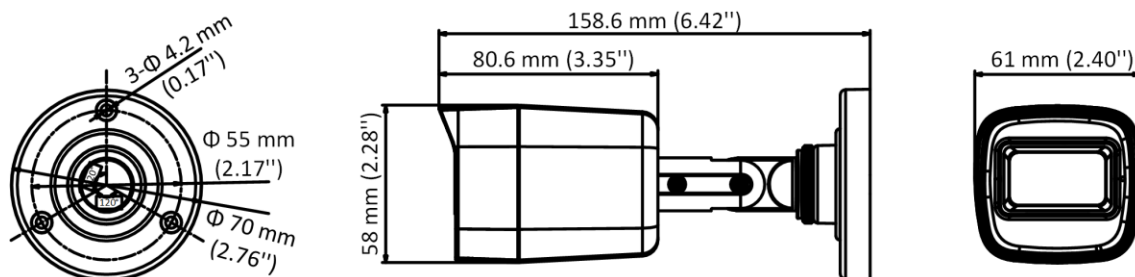

▪ Accessory

▪ Optional

DS-1280ZJ-XS



See Far, Go Further



www.hikvision.com
support@hikvision.com

