
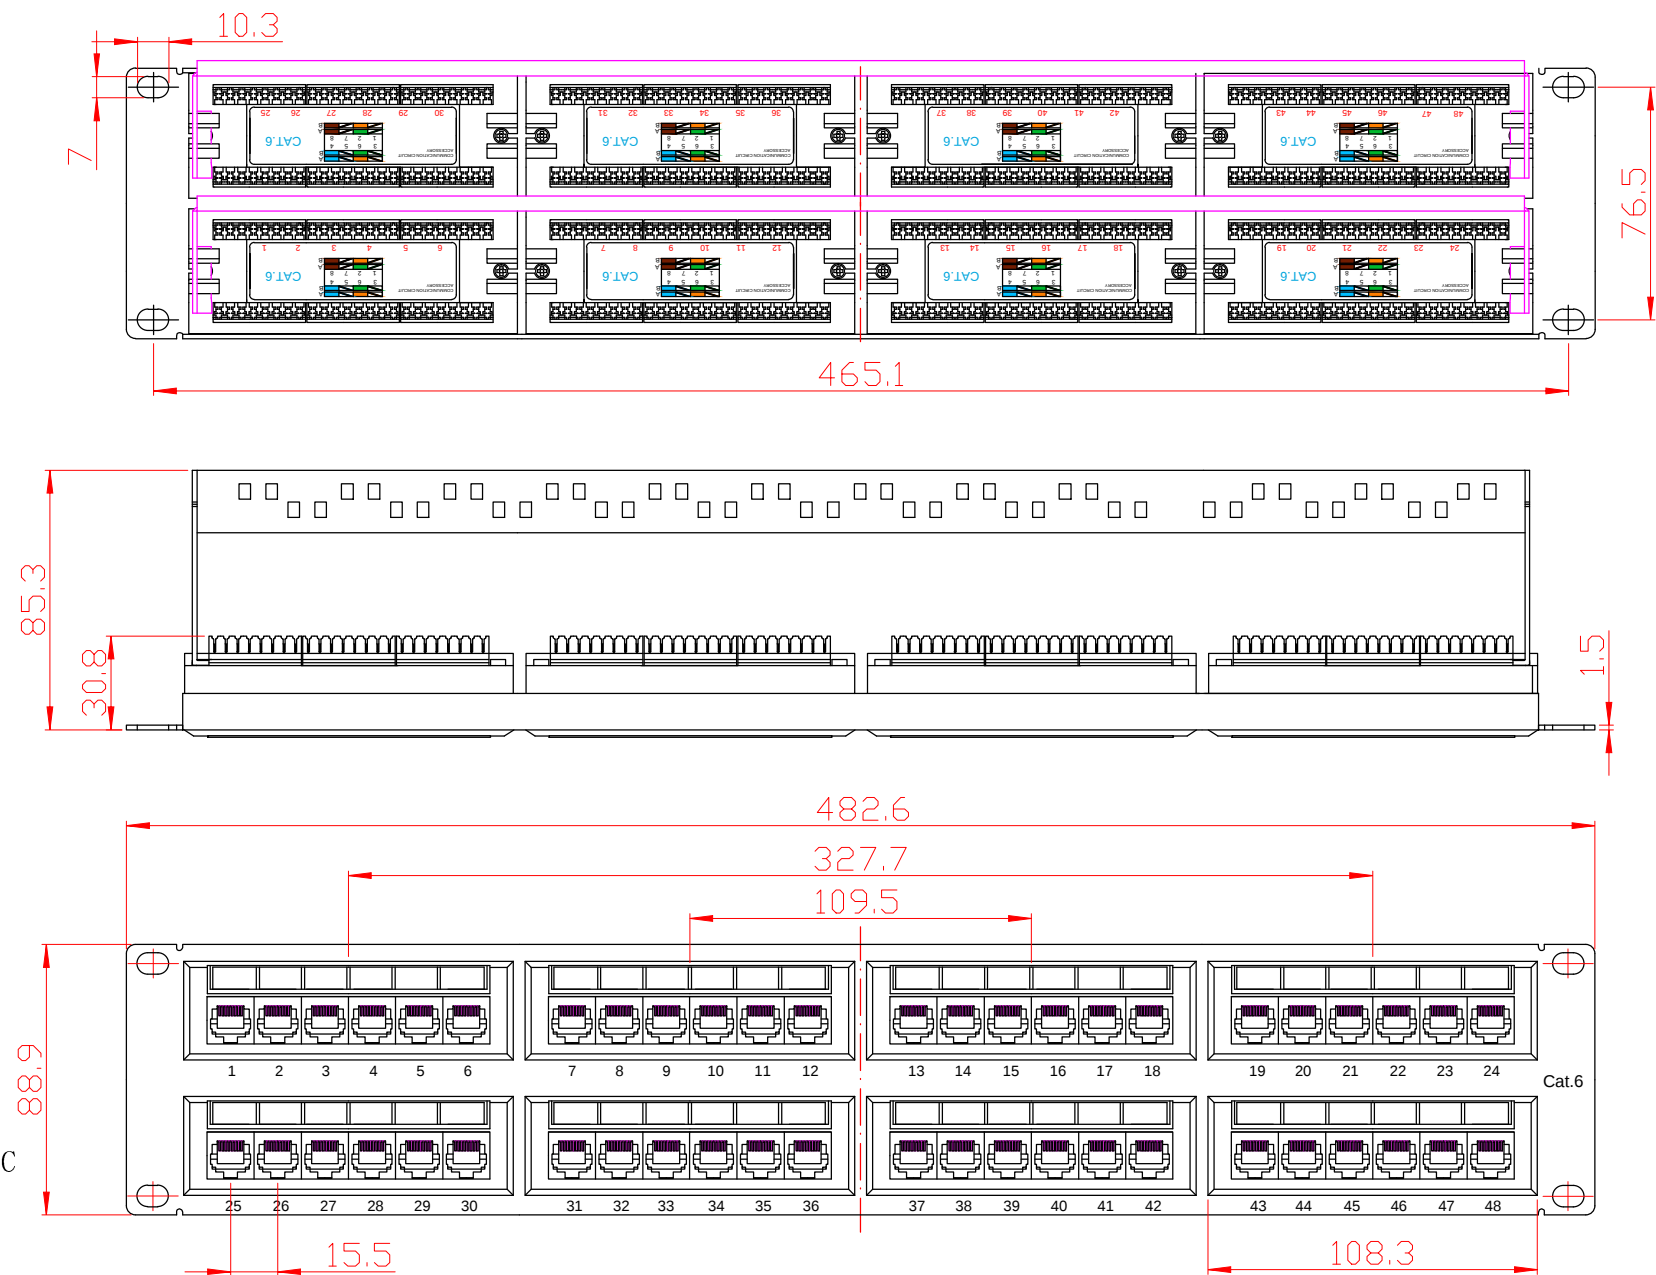




NOTES:

ELECTRICAL:



1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:ABS;
2. PANEL FRAME:CARBON STEEL, POWDER, COATING IN BLACK COLOR, Spec1.5mm;
3. PCB MATERIAL:FR-4 T=1.6mm;
4. IDC MATERIAL:PC , CONTACT:PHOSPHOR BRONZE; WITH NICKEL PATING;
5. RJ45 JACK LIFE:750 TIMES MIN;
6. IDC LIFE:200 TIMES MIN;
7. WIRE:AWG 22-26;

						 NINGBO TONGRUN ELECTRONICS CO.,LTD					
						Material				Item No.	TR-LY-PP6-06
SYM	Number	Bill No. of Alteration	Signature	Date	Angles Projection		Size	Scale	Unit	Part Name	48Ports Cat6 UTP Patch Panel With Back Bar
							A4	X:1	mm		
Drawn	Ding jian bo	2016.1.12	Tolerance				A4	X:1	mm	ERP	Part No.
Checked	Ge pei jun	2016.1.12	0.00-20.00 ±0.10 20.00-50.00 ±0.15 50.00-100.00 ±0.20								
Approved	Wang wei jun	2016.1.12	100.00-Angle ±0.25 ±30'								
				Sheet		1 OF 1		Version: A/0			